

Programmable controllers —

Part 1: General information

<http://www.china-gauges.com/>

The European Standard EN 61131-1:2003 has the status of a
British Standard

ICS 25.040.40; 35.240.50

National foreword

This British Standard is the official English language version of EN 61131-1:2003. It is identical with IEC 61131-1:2003. It supersedes BS EN 61131-1:1994 which is withdrawn.

The UK participation in its preparation was entrusted by Technical Committee GEL/65, Measurement and control, to Subcommittee GEL/65/2, Elements of systems, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international or European committee any enquiries on the interpretation of the proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the EN title page, pages 2 to 18, an inside back cover and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 8 August 2003

© BSI 8 August 2003

ISBN 0 580 42395 6

EUROPEAN STANDARD

EN 61131-1

NORME EUROPÉENNE

EUROPÄISCHE NORM

July 2003

ICS 25.040.40; 35.240.50

Supersedes EN 61131-1:1994

English version

Programmable controllers
Part 1: General information
(IEC 61131-1:2003)

Automates programmables
Partie 1: Informations générales
(CEI 61131-1:2003)

Speicherprogrammierbare Steuerungen
Teil 1: Allgemeine Informationen
(IEC 61131-1:2003)

This European Standard was approved by CENELEC on 2003-07-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Lithuania, Luxembourg, Malta, Netherlands, Norway, Portugal, Slovakia, Spain, Sweden, Switzerland and United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: rue de Stassart 35, B - 1050 Brussels

Foreword

The text of document 65B/484/FDIS, future edition 2 of IEC 61131-1, prepared by SC 65B, Devices, of IEC TC 65, Industrial-process measurement and control, was submitted to the IEC-CENELEC parallel vote and was approved by CENELEC as EN 61131-1 on 2003-07-01.

This European Standard supersedes EN 61131-1:1994.

The following dates were fixed:

- latest date by which the EN has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2004-04-01
- latest date by which the national standards conflicting with the EN have to be withdrawn (dow) 2006-07-01

Annexes designated "normative" are part of the body of the standard.
In this standard, annex ZA is normative.
Annex ZA has been added by CENELEC.

Endorsement notice

The text of the International Standard IEC 61131-1:2003 was approved by CENELEC as a European Standard without any modification.

<http://www.china-gauges.com/>

CONTENTS

INTRODUCTION	4
1 Scope	5
2 Normative references	5
3 Terms and definitions	6
4 Functional characteristics	7
4.1 Basic functional structure of a programmable controller system	7
4.2 Characteristics of the CPU function	10
4.3 Characteristics of the interface function to sensors and actuators	12
4.4 Characteristics of the communication function	13
4.5 Characteristics of the human-machine interface (HMI) function	13
4.6 Characteristics of the programming, debugging, monitoring, testing and documentation functions	13
4.7 Characteristics of the power-supply functions	15
5 Availability and reliability	15
 Annex ZA (normative) Normative references to international publications with their corresponding European publications	 17
 Bibliography	 18
 Figure 1 – Basic functional structure of a PLC-system	 7
Figure 2 – Programmable controller hardware model (from IEC 61131-5)	8
Figure 3 – Typical interface/port diagram of a PLC-system (from IEC 61131-2)	9
 Table 1 – Summary of programmable functions	 11

http://www.china-gauges.com/

INTRODUCTION

This Part of IEC 61131 constitutes Part 1 of a series of standards on programmable controllers and their associated peripherals and should be read in conjunction with the other parts of the series.

Where a conflict exists between this and other IEC standards (except basic safety standards), the provisions of this standard should be considered to govern in the area of programmable controllers and their associated peripherals.

The purposes of this standard are:

Part 1 establishes the definitions and identifies the principal characteristics relevant to the selection and application of programmable controllers and their associated peripherals;

Part 2 specifies equipment requirements and related tests for programmable controllers (PLC) and their associated peripherals;

Part 3 defines, for each of the most commonly used programming languages, major fields of application, syntactic and semantic rules, simple but complete basic sets of programming elements, applicable tests and means by which manufacturers may expand or adapt those basic sets to their own programmable controller implementations;

Part 4 gives general overview information and application guidelines of the standard for the PLC end-user;

Part 5 defines the communication between programmable controllers and other electronic systems;

Part 6 is reserved;

Part 7 defines the programming language for fuzzy control;

Part 8 gives guidelines for the application and implementation of the programming languages defined in Part 3.

<http://www.china-gauges.com/>

PROGRAMMABLE CONTROLLERS –

Part 1: General information

1 Scope

This Part of IEC 61131 applies to programmable controllers (PLC) and their associated peripherals such as programming and debugging tools (PADTs), human-machine interfaces (HMIs), etc., which have as their intended use the control and command of machines and industrial processes.

PLCs and their associated peripherals are intended to be used in an industrial environment and may be provided as open or enclosed equipment. If a PLC or its associated peripherals are intended for use in other environments, then the specific requirements, standards and installation practices for those other environments must be additionally applied to the PLC and its associated peripherals.

The functionality of a programmable controller can be performed as well on a specific hardware and software platform as on a general-purpose computer or a personal computer with industrial environment features. This standard applies to any products performing the function of PLCs and/or their associated peripherals. This standard does not deal with the functional safety or other aspects of the overall automated system. PLCs, their application programme and their associated peripherals are considered as components of a control system.

Since PLCs are component devices, safety considerations for the overall automated system including installation and application are beyond the scope of this Part. However, PLC safety as related to electric shock and fire hazards, electrical interference immunity and error detecting of the PLC-system operation (such as the use of parity checking, self-testing diagnostics, etc.), are addressed. Refer to IEC 60364 or applicable national/local regulations for electrical installation and guidelines.

This Part of IEC 61131 gives the definitions of terms used in this standard. It identifies the principal functional characteristics of programmable controller systems.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61131-2, *Programmable controllers – Part 2: Equipment requirements and tests*¹

IEC 61131-3:2003, *Programmable controllers – Part 3: Programming languages*

¹ To be published.

<http://www.china-gauges.com/>

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

application programme or user programme

logical assembly of all the programming language elements and constructs necessary for the intended signal processing required for the control of a machine or process by a PLC-system

3.2

automated system

control system beyond the scope of IEC 61131, in which PLC-systems are incorporated by or for the user, but which also contains other components including their application programmes

3.3

field device

catalogued part to provide input and/or output interfaces or to provide data pre-processing/post-processing to the programmable controller system. A remote field device may operate autonomously from the programmable controller system. It can be connected to the programmable controller using a field bus

3.4

ladder diagram or relay ladder diagram

one or more networks of contacts, coils, graphically represented functions, function blocks, data elements, labels, and connective elements, delimited on the left and (optionally) on the right by power rails

3.5

programmable (logic) controller (PLC)

digitally operating electronic system, designed for use in an industrial environment, which uses a programmable memory for the internal storage of user-oriented instructions for implementing specific functions such as logic, sequencing, timing, counting and arithmetic, to control, through digital or analogue inputs and outputs, various types of machines or processes. Both the PLC and its associated peripherals are designed so that they can be easily integrated into an industrial control system and easily used in all their intended functions

NOTE The abbreviation PLC is used in this standard to stand for programmable controllers, as is the common practice in the automation industry. The use of PC as an abbreviation for programmable controllers leads to confusion with personal computers.

3.6

programmable controller system or PLC-system

user-built configuration, consisting of a programmable controller and associated peripherals, that is necessary for the intended automated system. It consists of units interconnected by cables or plug-in connections for permanent installation and by cables or other means for portable and transportable peripherals

3.7

programming and debugging tool (PADT)

catalogued peripheral to assist in programming, testing, commissioning and troubleshooting the PLC-system application, programme documentation and storage and possibly to be used as HMIs. PADTs are said to be pluggable when they may be plugged or unplugged at any time into their associated interface, without any risk to the operators and the application. In all other cases, PADTs are said to be fixed

<http://www.china-gauges.com/>

3.8 remote input/output station (RIOS)

manufacturer's catalogued part of a PLC-system including input and/or output interfaces allowed to operate only under the hierarchy of the main processing unit (CPU) for I/O multiplexing/demultiplexing and data pre-processing/post-processing. The RIOS is the only permitted limited autonomous operation, for example, under emergency conditions such as breakdown of the communication link to the CPU or of the CPU itself, or when maintenance and troubleshooting operations are to be performed

4 Functional characteristics

4.1 Basic functional structure of a programmable controller system

The general structure with main functional components in a programmable controller system is illustrated in Figures 1, 2 and 3. These functions communicate with each other and with the signals of the machine/process to be controlled.

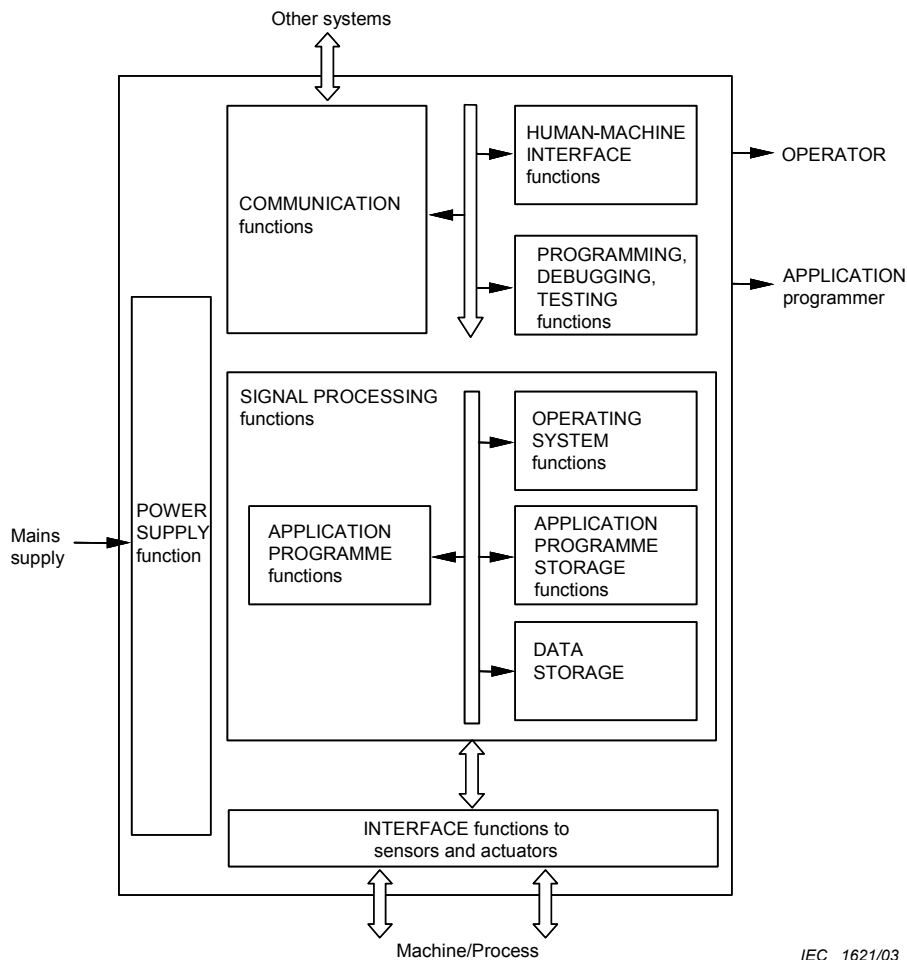


Figure 1 – Basic functional structure of a PLC-system


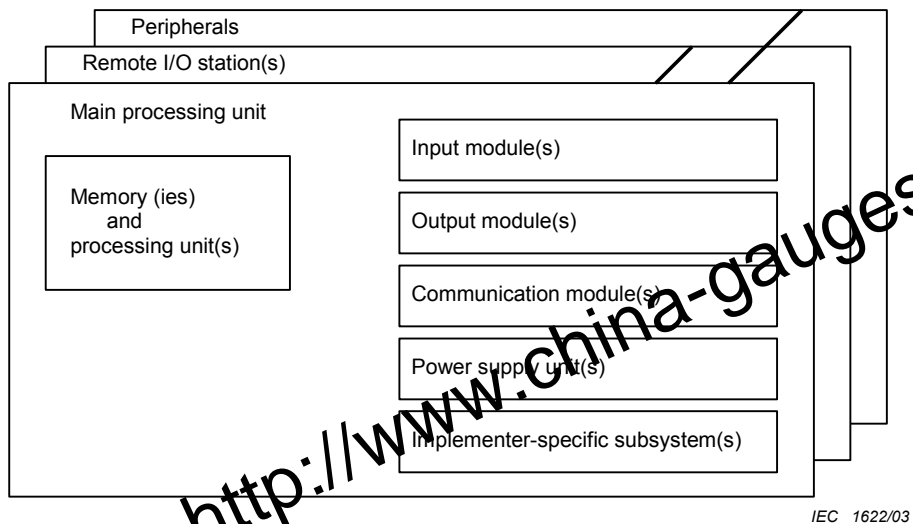


Figure 2 – Programmable controller hardware model (from IEC 61131-5)

<http://www.china-gauges.com/>

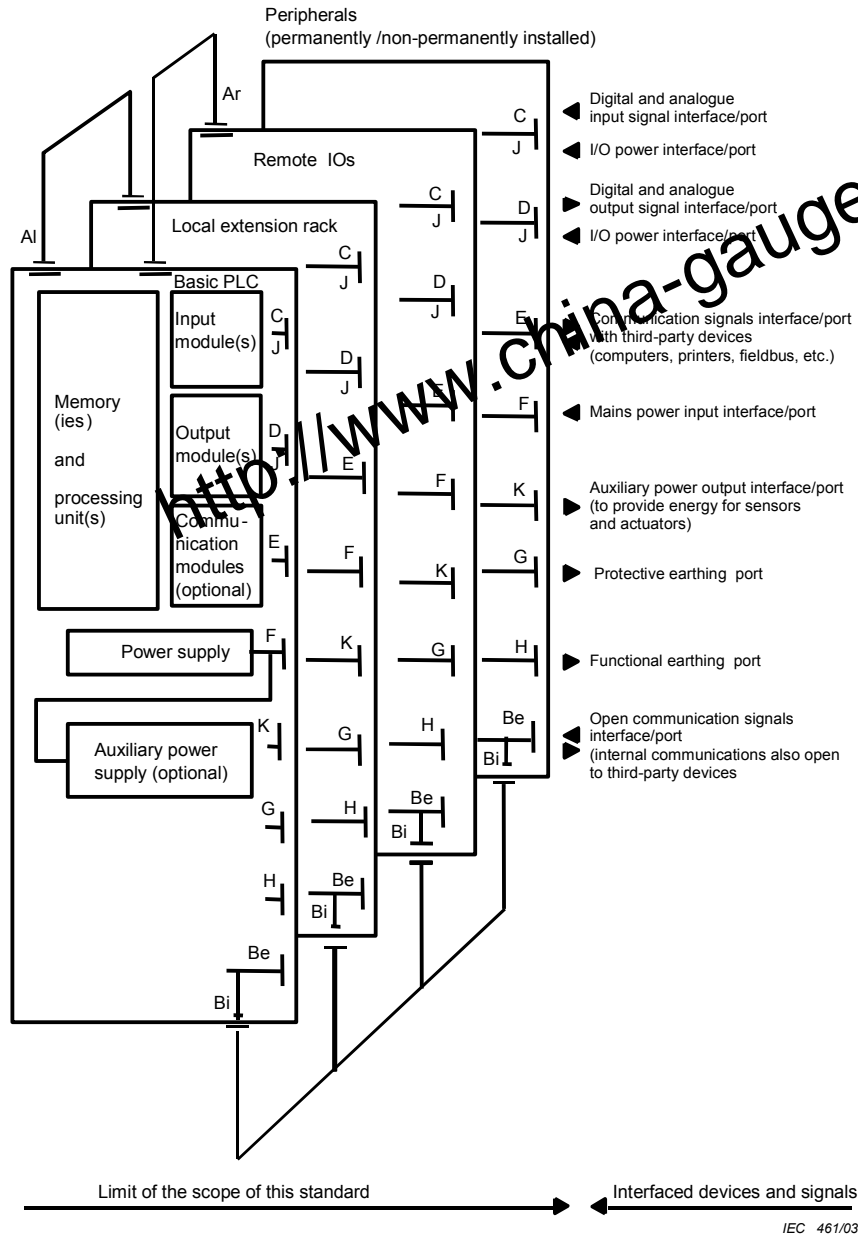

Key

- Al Communication interface/port for local I/O
- Ar Communication interface/port for remote I/O station
- Be Open-communication interface/port also open to third-party devices (for example, personal computer used for programming instead of a PADT)
- Bi Internal communication interface/port for peripherals
- C Interface/port for digital and analogue input signals
- D Interface/port for digital and analogue output signals
- E Serial or parallel communication interfaces/ports for data communication with third-party devices
- F Mains power interface/port. Devices with F ports have requirements on keeping downstream devices intelligent during power-up, power-down and power interruptions.
- G Port for protective earthing
- H Port for functional earthing
- J I/O power interface/port used to power sensors and actuators
- K Auxiliary power output interface/port

Figure 3 – Typical interface/port diagram of a PLC-system (from IEC 61131-2)

IEC 461/03

The CPU function consists of the application programme storage, the data storage, the operating system, and the execution of the application programme functions.

The CPU processes signals obtained from sensors as well as internal data storage and generates signals to actuators as well as internal data storage in accordance with the application programme.

- **Interface function to sensors and actuators**

The interface function to sensors and actuators converts

- the input signals and/or data obtained from the machine/process to appropriate signal levels for processing;
- the output signals and/or data from the signal processing function to appropriate signal levels to drive actuators and/or displays.

The input/output signals to the interface functions may be coming from special modules which pre-process external sensor signals according to the defined functions contained in the special modules themselves. Examples of such special modules include PID module, fuzzy-control module, high-speed counter module, motion modules and others.

- **Communication function**

The communication function provides data exchange with other systems (third-party devices) such as other PLC-systems, robot controllers, computers, etc.

- **Human-machine interface (HMI) function**

The HMI function provides for interaction between the operator, the signal processing function and the machine/process.

- **Programming, debugging, testing and documentation functions**

These functions provide for application programme generation and loading, monitoring, testing and debugging as well as for application programme documentation and archiving.

- **Power-supply functions**

The power-supply functions provide for the conversion and isolation of the PLC-system power from the mains supply.

4.2 Characteristics of the CPU function

4.2.1 Summary

The capabilities of the programmable controllers are determined by programmable functions which are summarized in Table 1. They are subdivided for ease of use into application-oriented groups.

Table 1 – Summary of programmable functions

Function group	Examples
Logic control <ul style="list-style-type: none"> – Logic – Timers – Counters 	Programming language elements AND, OR, NOT, XOR, bi-stable elements On-delay, off-delay Up- and/or down-counting (of pulses)
Signal/data processing <ul style="list-style-type: none"> – Mathematical functions – Data handling – Analogue data processing 	Basic arithmetic: ADD, SUB, MUL, DIV Extended arithmetic: SQRT, trigonometric functions Comparisons: greater, smaller, equal Selecting, formatting, moving PID, integration, filtering (not as standard elements) Fuzzy control
Interfacing functions <ul style="list-style-type: none"> – Input/output – Other systems – HMI – Printers – Mass memory 	Analogue, digital I/O modules BCD conversion Communication protocols Display, commands Messages, reports Logging
Execution control	Periodic, event-driven execution
System configuration	Status checking (not as standard elements)

4.2.2 Operating system

The operating system function is responsible for the management of internal PLC-system interdependent functions (configuration control, diagnostics, memory management, application programme execution management, communication with peripherals and with the interface functions to sensors and actuators, etc.).

After a power-down or a distortion, the PLC system can restart in three different ways.

a) Cold restart

Restart of the PLC-system and its application programme after all dynamic data (variables such as I/O image, internal registers, timers, counters, etc., and programme contexts) are reset to a predetermined state. A cold restart may be automatic (for example, after a power failure, a loss of information in the dynamic portion(s) of the memory(ies), etc.) or manual (for example, push-button reset, etc.).

b) Warm restart

Restart after a power failure with a user-programmed predetermined set of remnant data and a system predetermined application programme context. A warm restart is identified by a status flag or equivalent means made available to the application programme indicating that the power failure shut-down of the PLC-system was detected in the run mode.

c) Hot restart

Restart after power failure that occurs within the process-dependent maximum time allowed for the PLC-system to recover as if there had been no power failure.

All I/O information and other dynamic data as well as the application programme context are restored or unchanged.

Hot-restart capability requires a separately powered real-time clock or timer to determine elapsed time since the power failure was detected and a user-accessible means to programme the process-dependent maximum time allowed.

<http://www.china-gauges.com/>

4.2.3 Memory for application data storage

- **Application programme storage**

The application programme storage provides for memory locations to store a series of instructions whose periodic or event-driven execution determines the progression of the machine or the process. The application programme storage may also provide for memory locations to store initial values for application programme data.

- **Application data storage**

The application data storage provides for memory locations to store I/O image table and data (for example, set values for timers, counter alarm conditions, parameters and recipes for the machine or the process) required during the execution of the application programme.

- **Memory type, memory capacity, memory utilization**

Various types of memory are in use: read/write (RAM), read-only (ROM), programmable read-only (PROM), reprogrammable read-only (EPROM/UV-PROM, EEPROM). Memory retention at power failure is achieved by a proper selection of the memory type where applicable (for example, EPROM, EEPROM) or the use of memory back-up for volatile memories (for example, a battery).

Memory capacity relates to the number of memory locations in Kbytes, which are reserved to store both the application programme and the application data. Memory capacity measurements are:

- capacity in the minimum useful configuration;
- size(s) for expansion increments;
- capacity(ies) at maximal configuration(s).

Each programmable function used by the application programme occupies memory locations. The number of locations required generally depends on the programmable functions and the type of programmable controller.

Application data storage requires memory capacity depending on the amount and format of data stored.

4.2.4 Execution of the application programme

An application programme may consist of a number of tasks. The execution of each task is accomplished sequentially, one programmable function at a time until the end of the task. The initiation of a task, periodically or upon the detection of an event (interrupt condition), is under the control of the operating system.

4.3 Characteristics of the interface function to sensors and actuators

a) Types of input/output signals

Status information and data from the machine/process are conveyed to the I/O system of the programmable controller by binary, digital, incremental or analogue signals. Conversely, decisions and results determined by the processing function are conveyed to the machine/process by use of appropriate binary, digital, incremental or analogue signals. The large variety of sensors and actuators used requires accommodating a wide range of input and output signals.

b) Characteristics of the input/output system

Various methods of signal processing, conversion and isolation are used in input/output systems. The behaviour and performance of the PLC-system depend on the static/dynamic evaluation of the signal (detection of events), storing/non-storing procedures, opto-isolation, etc.

http://www.china-gauges.com/

Input/output systems in general display a modular functionality which allows for configuration of the PLC-system according to the needs of the machine/process and also for later expansion (up to the maximum configuration).

The input/output system may be located in close proximity to the signal processing function or may be mounted close to the sensors or actuators of the machine/process, remotely from the signal-processing function.

4.4 Characteristics of the communication function

The communication function represents the communication aspects of a programmable controller. It serves the programme and data exchange between the programmable controller and external devices or other programmable controllers or any devices in an automated system.

It provides functions such as device verification, data acquisition, alarm reporting, programme execution, and I/O control, application programme transfer, and connection management to the signal-processing unit of the PLC from or to an external device.

The communication function is generally accomplished by serial data transmission over local area networks or point-to-point links.

4.5 Characteristics of the human-machine interface (HMI) function

The HMI function has two purposes.

- To provide the operator with the information necessary for monitoring the operation of the machine/process.
- To allow the operator to interact with the PLC-system and its application programme in order to make decisions and adjustments beyond their individual user scope.

4.6 Characteristics of the programming, debugging, monitoring, testing and documentation functions

4.6.1 Summary

These functions are implemented as either an integral or an independent part of a programmable controller and provide for code generation and storage of the application programme and application data in the programmable controller memory(ies) as well as retrieving such programmes and data from memory(ies).

4.6.2 Language

For the programming of the application, there is a set of languages defined in IEC 61131-3.

a) Textual languages

- 1) Instruction list (IL) language
A textual programming language using instructions for representing the application programme for a PLC-system.
- 2) Structured text (ST) language
A textual programming language using assignment, sub-programme control, selection and iteration statements to represent the application programme for a PLC-system.

b) Graphical languages

- 1) Function block diagram (FBD) language
A graphical programming language using function block diagrams for representing the application programme for a PLC-system.

- 2) Ladder diagram (LD) language
A graphical programming language using ladder diagrams for representing the application programme for a PLC-system
- 3) Sequential function chart (SFC)
A graphical and textual notation for the use of steps and transitions to represent the structure of a program organization unit (program or function block) for a PLC-System. The transition conditions and the step action can be represented in a subset of the above-listed languages.

4.6.3 Writing the application programme

- **Generating the application programme**

The application programme may be entered via alphanumeric or symbolic keyboards and, when menu-driven displays are used, or a graphical programme entry is used via cursor keys, joystick, mouse, etc. All programme and data entries are generally checked for validity and internal consistency in such a way that the entry of incorrect programmes and data is minimized.

- **Displaying the application programme**

During application programme generation, all instructions are displayed immediately, statement by statement or segment by segment (in the case of a monitor or other large display). In addition, the complete programme can generally be printed. If alternative representation of programming language elements is available, then the display representation is generally user-selectable.

4.6.4 Automated system start-up

- a) **Loading the application programme**

The generated programme resides either in the memory of the programmable controller or in the memory of the PADT. The latter requires a programme transfer via down-load or memory cartridge insertion into the programmable controller before start-up.

- c) **Accessing the memory**

During start-up or trouble-shooting operations, the application programme and application data storage are accessed by the PADT as well as by the processing unit to allow programme monitoring, modification and correction. This may be done on line (i.e. while the PLC-system is controlling the machine/process).

- d) **Adapting the programmable controller system**

Typical functions for adapting the PLC-system to the machine/process to be controlled are:

- 1) test functions which check the sensors and actuators connected to the PLC-systems (for example, forcing the outputs of the PLC-system);
- 1) test functions which check the operation of the programme sequence (for example, setting of flags and forcing the inputs);
- 2) setting or resetting of variables (for example, timers, counters, etc.).

- e) **Indicating the automated system status**

The ability to provide information about the machine/process and the internal status of the PLC-system and of its application programme facilitates the start-up and debugging of a PLC application. Typical means are:

- 1) status indication for inputs/outputs;
- 3) indication/recording of status changes of external signals and internal data;
- 4) scan time/execution times monitoring;
- 5) real-time visualization of programme execution and data processing;
- 6) fuse/short-circuit protection status indicators.

http://www.china-gauges.com/

f) **Testing the application programme**

Test functions support the user during writing, debugging and checking the application programme. Typical test functions are:

- 1) checking the status of inputs/outputs, internal functions (timers, counters);
- 2) checking programme sequences, for example, step-by-step operations, variations of programme cycle time, halt commands;
- 3) simulation of interface functions, for example, forcing of I/Os, or information exchanged between tasks or modules internal to the PLC-system.

g) **Modifying the application programme**

Functions for modification provide for changing, adjusting and correcting application programmes. Typical functions are search, replace, insert, delete, and add; they apply to characters, instructions, programme modules, etc.

4.6.5 **Documentation**

A documentation package should be provided to fully describe the PLC-system and the application. The documentation package may consist of

- a) description of the hardware configuration with project-dependent notations;
- b) application programme documentation consisting of
 - 1) programme listing, with possibly mnemonics for signals and data processed;
 - 2) cross-reference tables for all data processed (I/Os, internal functions such as internal stored data, timers, counters, etc.);
 - 3) comments;
 - 4) description of modifications;
 - 5) maintenance manual.

4.6.6 **Application programme archiving**

For rapid repair and to minimize down-time, the user may want to store the application programme in non-volatile media such as flash, PC-cards, EEPROM, EPROM, disks, etc. Such a record needs to be updated after every programme modification so that the programme executing in the PLC-system and the archived programme remain the same.

4.7 **Characteristics of the power-supply functions**

The power-supply functions generate voltages necessary to operate the PLC-system and generally also provide control signals for proper ON/OFF synchronization of the equipment. Various power supplies may be available depending on supply voltages, power consumption, parallel connection, requirements for uninterruptible operation, etc.

5 **Availability and reliability**

Every automated system requires a certain level of availability and reliability of its control system. It is the user's responsibility to ensure that the architecture of the overall automated system, the characteristics of the PLC-system and its application programme will jointly satisfy the intended application requirements.

a) **Architecture of the automated system**

Techniques such as redundancy, fault tolerance and automatic error checking, as well as machine/process diagnostic functions can provide enhancements in the area of availability of the automated system.

<http://www.china-gauges.com/>

b) Architecture of the programmable controller system

A modular construction in conjunction with suitable internal self-tests allowing rapid fault identification may provide enhancements in the area of maintainability of the PLC-system and therefore of the availability of the automated system. Techniques such as redundancy and fault tolerance may also be considered for special applications.

c) Design, testing and maintenance of the application programme

The application programme is a key component of the overall automated system. Most programmable controllers provide enough computing power to permit implementation of diagnostic functions in addition to the minimum control function. Machine/process behaviour modelling and subsequent identification of faulty conditions should be considered.

Adequate testing of the application programme is mandatory. Every modification implies proper design and testing so that the overall availability and reliability are not impaired. The programme documentation shall be maintained and annotated accordingly.

d) Installation and service conditions

PLC-systems are typically of rugged design and intended for general-purpose service. However, as for any equipment, the more stressing the service conditions, the worse is the reliability, and benefit in this area may be expected when permitted service conditions are better than the normal service conditions specified in IEC 61131-2. Some applications may require consideration of special packaging, cooling, electrical noise protection, etc., for reliable operation.

<http://www.china-gauges.com/>

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies (including amendments).

NOTE When an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 61131-2	- 1)	Programmable controllers Part 2: Equipment requirements and tests	EN 61131-2	2003 2)
IEC 61131-3	2003	Part 3: Programming languages	EN 61131-3	2003

1) Undated reference.

2) Valid edition at date of issue.

Bibliography

IEC 60050-351:1998, *International Electrotechnical Vocabulary (IEV) – Part 351: Automatic control*

<http://www.china-gauges.com/>

<http://www.china-gauges.com/>

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001. Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager. Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553. Email: copyright@bsi-global.com.